




HEAVY DUTY



COOLING TODAY, BETTER TOMORROW

SRK13CRS-S6

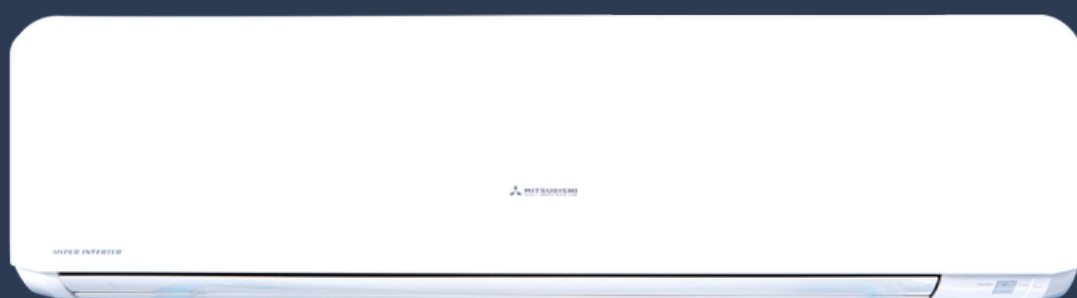


MADE IN THAILAND

Next
Generation
High
Performance
Airconditioning

MOVE THE WORLD FORWARD

SURROUNDING COOLING

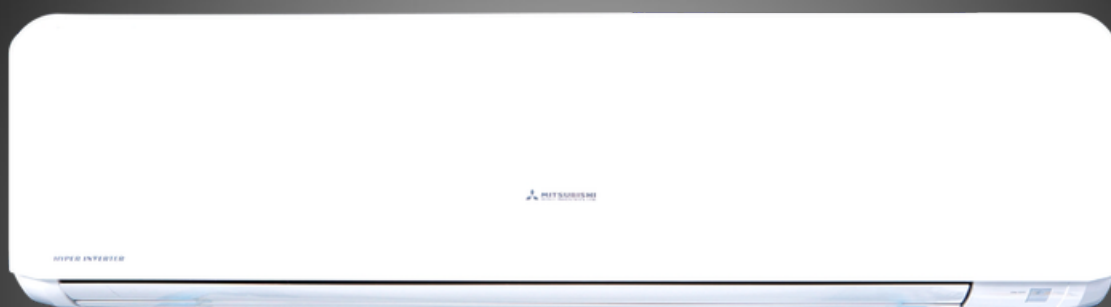

SRK13CRS-S6

Features


Comfortable Air Flow Functions



Comfortable Function



Convenient & Economy Functions



Maintenance



Clean Air

Others



Core Specifications

SRK1 3CRS-S6 | PRODUCT SPECIFICATIONS

Specification	SRK13CRS-S6
Model	SRK13CRS-S6
Capacity	1.1 Ton
BEE Star Rating - 2025	2 Star
Refrigerant	R410A
Refrigerant Control & Expansion	Dual Capillary Expansion
Compressor Type	Super Tropical - Return Cooled Rotary 1
Power Source	Phase, 230 V, 50 Hz
Maximum Cooling Capacity	13,501 BTU/hr
Rated Cooling Capacity @ 100% Load	12,283 BTU/hr
Maximum Cooling Capacity	3,957 Watts
Rated Cooling Capacity @ 100% Load	3,600 Watts
Rated Power Consumption @ 100% Load	1,000 Watts
Rated EER / COP @ 100% Load	3.60 W/W
BEE Rated Indian Seasonal Energy Efficiency Ratio (ISEER)	3.60
Input Power (Minimum ~ Maximum)	700 ~ 1,000 Watts
Current (Minimum ~ Maximum)	4.0 ~ 4.7 A

Dimensions & Airflow

Unit	Dimensions	Net Weight
Indoor Unit	268 × 790 × 213 mm	9.5 kg
Outdoor Unit	595 × 795 × 290 mm	32 kg

Airflow & Acoustic

SRK13CRS-S6 | PRODUCT SPECIFICATIONS


Parameter	Value	
Air Flow	750 m³/hr	
Long Reach Airflow Upto	6.09 m	
Sound Level (H/M/L)	38 / 34 / 31 dB	
Louver Swing	3D + 3D AUTO	

Technical Details

SRK13CRS-S6 | PRODUCT SPECIFICATIONS

Technical Parameter	SRK13CRS-S6
Special Filter	Enzyme + Solar + Anti-Bacterial Filter
Blower Fan	Anti-Micro Bial
DC Fan Motor Speed	Auto / Powerful / High / Med / Low / Dry 4
Refrigerant Injection in Coil	Point - Multi Port
Liquid Line	6.35 mm (1/4")
Gas Line	12.7 mm (1/2")
Main Power Supply to Indoor Unit	2.5 mm ² × 3 cores (earthing cable)
Connecting Wiring between IDU & ODU	2.5 mm ² × 4 cores (earthing cable) 11.98
Area Coverage	~ 15.97 sq. meter
Maximum Refrigerant Pipe Length	15 m
Maximum Height Difference	10 m

Refrigerant Pipe Length



- * Cooling Capacity is derived Maximum during evening & night when the temperature is less than 31°C
** Under Standard Installation & Lab Test Condition # Model SRK24CW-S6 with 2D Air flow only



Address: D-157, Ground Floor Shop West Patel Nagar, Front Of
Bank Of Baroda News Delhi- 110008
E-mail: universeelectronic13@gmail.com
Mobile: +91-9911566744

