




SRK20CSS-S6/A

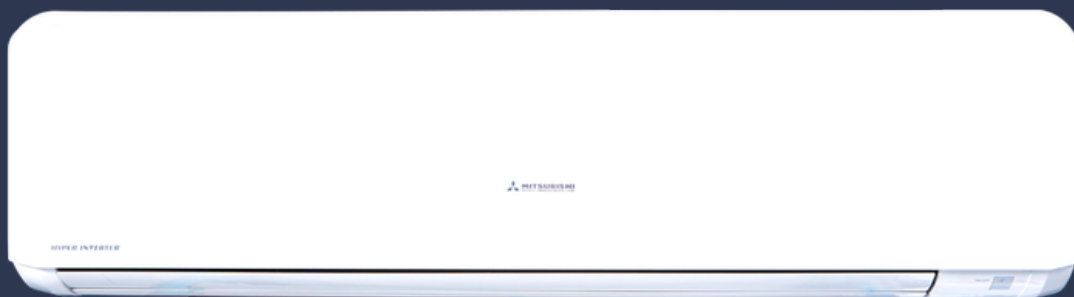


SRK20CSS-S6/A

MADE IN THAILAND

Next
Generation
High
Performance
Airconditioning

MOVE THE WORLD FORWARD

SURROUNDING COOLING

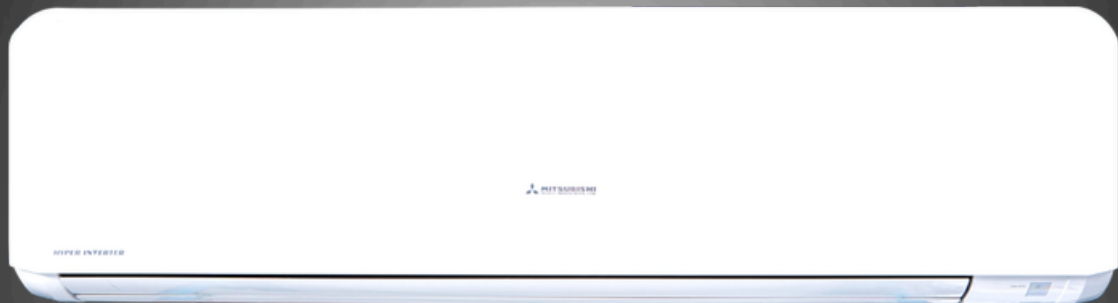

SRK20CSS-S6/A

Features

Comfortable Air Flow Functions




Comfortable Function



Convenient & Economy Functions



Maintenance



Clean Air



Others



Core Specifications

SSRK 20CSS-S6/AI PRODUCT SPECIFICATIONS

Parameter	SRK20CSS-S6/A
Model	SRK20CSS-S6/A
Capacity	1.7 Ton
BEE Star Rating - 2025	3 Star
Refrigerant	R410A
Refrigerant Control & Expansion	Dual Capillary Expansion
Compressor Type	Super Tropical - Return Cooled Rotary 1
Power Source	Phase, 230 V, 50 Hz
Maximum Cooling Capacity	20,997 BTU/hr
Rated Cooling Capacity @ 100% Load	20,216 BTU/hr
Maximum Cooling Capacity	6,154 Watts
Rated Cooling Capacity @ 100% Load	5,925 Watts
Rated Power Consumption @ 100% Load	1,485 Watts
Rated EER / COP @ 100% Load	3.99 W/W
BEE Rated Indian Seasonal Energy Efficiency Ratio (ISEER)	3.99
Input Power (Minimum ~ Maximum)	1,250 ~ 1,485 Watts
Current (Minimum ~ Maximum)	5.6 ~ 6.6 A

Dimensions & Airflow

SRK20CSS-S6/A | PRODUCT SPECIFICATIONS

Unit	Dimensions	Net Weight
Indoor Unit	339 × 1197 × 262 mm	16 kg
Outdoor Unit	640 × 850 (+65) × 290 mm	41 kg

Airflow & Acoustic

SRK20CSS-S6/A | PRODUCT SPECIFICATIONS


Parameter	SRK20CSS-S6/A	
Air Flow	1,350 m³/hr	
Long Reach Airflow Upto	17.06 m	
Sound Level (H/M/L)	43 / 40 / 37 dB	
Louver Swing	3D + 3D AUTO	

Technical Details

SRK20CSS-S6/A | PRODUCT SPECIFICATIONS

Parameter	SRK20CSS-S6/A
Special Filter	Enzyme + Photocatalytic Deodorizing Filter + Anti Bacterial
Blower Fan	Anti - Micro Bial
DC Fan Motor Speed	Hi - Power / Auto / High / Med / Low
Refrigerant Injection in Coil	5 Point - Multi Port
Liquid Line	6.35 mm (1/4")
Gas Line	15.88 mm (5/8")
Main Power Supply to Outdoor Unit	2.5 mm ² × 3 cores (including earthing cable)
Connecting Wiring between IDU & ODU	2.5 mm ² × 4 cores (including earthing cable)
Area Coverage	15.97 ~ 26.01 sq. meter
Maximum Refrigerant Pipe Length	15 m
Maximum Height Difference	10 m

Refrigerant Pipe Length



- * Cooling Capacity is derived Maximum during evening & night when the temperature is less than 31°C
** Under Standard Installation & Lab Test Condition # Model SRK24CW-S6 with 2D Air flow only



Address: D-157, Ground Floor Shop West Patel Nagar, Front Of
Bank Of Baroda News Delhi- 110008
E-mail: universeelectronic13@gmail.com
Mobile: +91-9911566744

