



**HEAVY DUTY**




COOLING TODAY, BETTER TOMORROW

MITSUBISHI HEAVY INDUSTRIES

# SRK24CW-S6

1.95 Ton | R410A | 2 Star

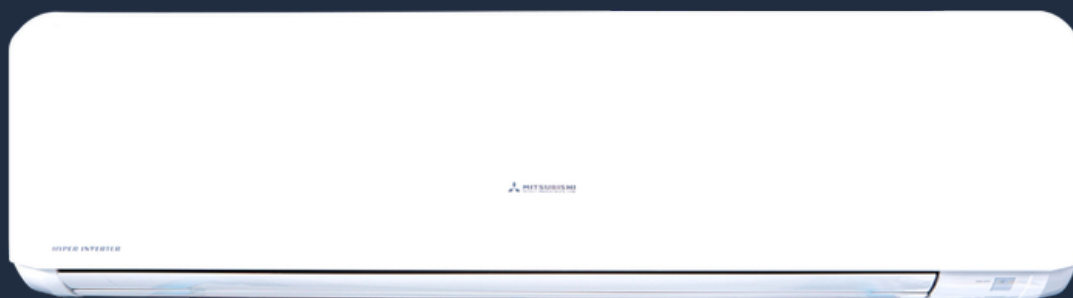


MADE IN THAILAND

Next  
Generation  
High  
Performance  
Airconditioning

MOVE THE WORLD FORWARD

SURROUNDING COOLING

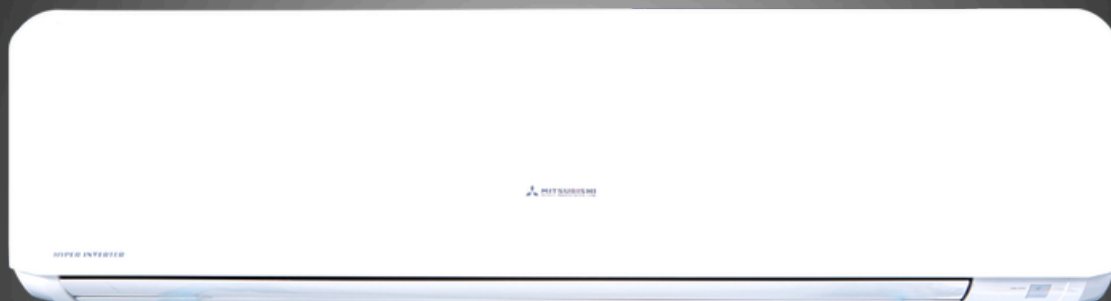

MITSUBISHI HEAVY INDUSTRIES

# SRK24CW-S6

1.95 Ton | R410A | 2 Star

## Features

### Comfortable Air Flow Functions



### Comfortable Function



### Convenient & Economy Functions



### Maintenance



### Clean Air



### Others



# Core Specifications

## SRK2 4CW-S6 PRODUCT SPECIFICATIONS

| Parameter                                                 | SRK24CW-S6                              |
|-----------------------------------------------------------|-----------------------------------------|
| Model                                                     | SRK24CW-S6                              |
| Capacity                                                  | 1.95 Ton                                |
| BEE Star Rating - 2025                                    | 2 Star                                  |
| Refrigerant                                               | R410A                                   |
| Refrigerant Control & Expansion                           | Dual Capillary Expansion                |
| Compressor Type                                           | Super Tropical - Return Cooled Rotary 1 |
| Power Source                                              | Phase, 230 V, 50 Hz                     |
| Maximum Cooling Capacity                                  | Not mentioned in catalog table          |
| Rated Cooling Capacity @ 100% Load                        | 23,406 BTU/hr                           |
| Maximum Cooling Capacity                                  | Not mentioned in catalog table          |
| Rated Cooling Capacity @ 100% Load                        | 6,860 Watts                             |
| Rated Power Consumption @ 100% Load                       | 1,820 Watts                             |
| Rated EER / COP @ 100% Load                               | 3.77 W/W                                |
| BEE Rated Indian Seasonal Energy Efficiency Ratio (ISEER) | 3.77                                    |
| Input Power (Minimum ~ Maximum)                           | 1,570 ~ 1,820 Watts                     |
| Current (Minimum ~ Maximum)                               | 7.0 ~ 8.1 A                             |

## Dimensions & Airflow

| Unit         | Dimensions               | Net Weight |
|--------------|--------------------------|------------|
| Indoor Unit  | 339 × 1197 × 262 mm      | 16 kg      |
| Outdoor Unit | 640 × 800 (+71) × 290 mm | 44 kg      |

## Airflow & Acoustic

### SRK25CSS-S6/A PRODUCT SPECIFICATIONS


| Parameter               | SRK24CW-S6      |  |
|-------------------------|-----------------|--|
| Air Flow                | 1,300 m³/hr     |  |
| Long Reach Airflow Upto | 17.06 m         |  |
| Sound Level (H/M/L)     | 46 / 42 / 39 dB |  |
| Louver Swing            | 2D              |  |

# Technical Details

## SRK24CW-S6 PRODUCT SPECIFICATIONS

| Parameter                           | SRK24CW-S6                                                          |
|-------------------------------------|---------------------------------------------------------------------|
| Special Filter                      | Natural Enzyme + Photocatalytic Deodorizing Filter + Anti Bacterial |
| Blower Fan                          | Anti - Micro Bial                                                   |
| DC Fan Motor Speed                  | Auto / Powerful / High / Med / Low / Dry                            |
| Refrigerant Injection in Coil       | Not separately specified in catalog table                           |
| Liquid Line                         | 6.35 mm (1/4")                                                      |
| Gas Line                            | 15.88 mm (5/8")                                                     |
| Main Power Supply to Outdoor Unit   | 2.5 mm <sup>2</sup> × 3 cores (earthing cable)                      |
| Connecting Wiring between IDU & ODU | 2.5 mm <sup>2</sup> × 4 cores (earthing cable)                      |
| Area Coverage                       | 23.22 ~ 32.5 sq. meter                                              |
| Maximum Refrigerant Pipe Length     | 15 m                                                                |
| Maximum Height Difference           | 10 m                                                                |

### Refrigerant Pipe Length



- \* Cooling Capacity is derived Maximum during evening & night when the temperature is less than 31°C
- \*\* Under Standard Installation & Lab Test Condition # Model SRK24CW-S6 with 2D Air flow only



Address: D-157, Ground Floor Shop West Patel Nagar, Front Of  
Bank Of Baroda News Delhi- 110008  
E-mail: universeelectronic13@gmail.com  
Mobile: +91-9911566744

