



HEAVY DUTY




COOLING TODAY, BETTER TOMORROW

MITSUBISHI HEAVY INDUSTRIES

SRK15CAPDA-W

2.2T on | R410A | 2Star

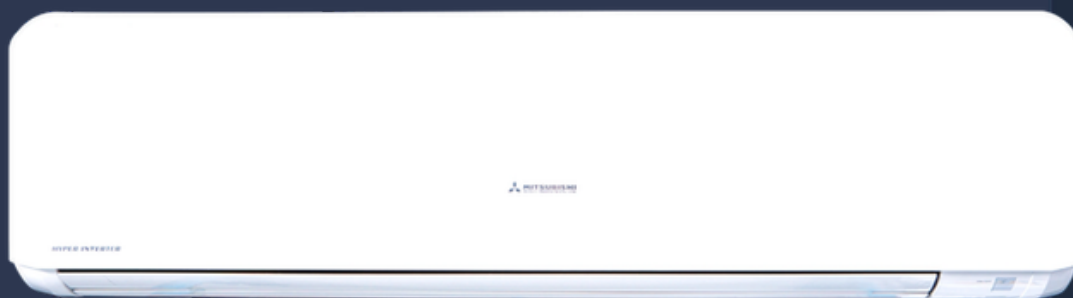


MADE IN THAILAND

Next
Generation
High
Performance
Airconditioning

MOVE THE WORLD FORWARD

SURROUNDING COOLING

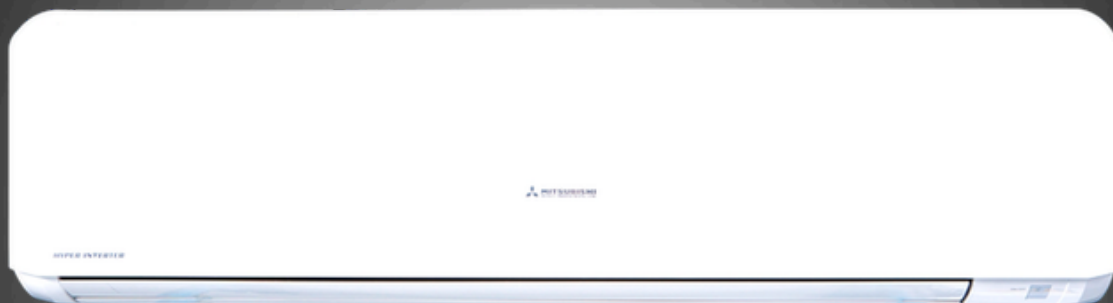

MITSUBISHI HEAVY INDUSTRIES

SRK25CSS-S6/A


2.2 Ton 1 R410A 12Star

Features

Comfortable Air Flow Functions



Comfortable Function




Convenient & Economy Functions

Maintenance



Clean Air

Clean



Core Specifications

SRK25CSS-S6/A PRODUCT SPECIFICATIONS

Parameter	SRK25CSS-S6/A
Model	SRK25CSS-S6/A
Capacity	2.2 Ton
BEE Star Rating - 2025	2 Star
Refrigerant	R410A
Refrigerant Control & Expansion	Dual Capillary Expansion
Compressor Type	Super Tropical - Return Cooled Rotary 1
Power Source	Phase, 230 V, 50 Hz
Maximum Cooling Capacity	26,272 BTU/hr
Rated Cooling Capacity @ 100% Load	26,017 BTU/hr
Maximum Cooling Capacity	7,700 Watts
Rated Cooling Capacity @ 100% Load	7,625 Watts
Rated Power Consumption @ 100% Load	2,050 Watts
Rated EER / COP @ 100% Load	3.72 W/W
BEE Rated Indian Seasonal Energy Efficiency Ratio (ISEER)	3.72
Input Power (Minimum ~ Maximum)	1,800 ~ 2,050 Watts
Current (Minimum ~ Maximum)	8.0 ~ 9.2 A

Dimensions & Airflow

Unit	Dimensions	Net Weight
Indoor Unit	339 × 1197 × 262 mm	16 kg
Outdoor Unit	750 × 880 (+88) × 340 mm	557 kg

Airflow & Acoustic

SRK25CSS-S6/A PRODUCT SPECIFICATIONS


Parameter	SRK25CSS-S6/A	
Air Flow	1,450 m³/hr	
Long Reach Airflow Upto	18.28 m	
Sound Level (H/M/L)	46 / 42 / 39 dB	
Louver Swing	3D + 3D AUTO	

Technical Details

SRK25CWX-S6I PRODUCT SPECIFICATIONS

Parameter	SRK25CSS-S6/A
Special Filter	Enzyme + Photocatalytic Deodorizing Filter + Anti Bacterial
Blower Fan	Anti - Micro Bial
DC Fan Motor Speed	Hi - Power / Auto / High / Med / Low
Refrigerant Injection in Coil	5 Point - Multi Port
Liquid Line	6.35 mm (1/4")
Gas Line	15.88 mm (5/8")
Main Power Supply to Outdoor Unit	2.5 mm ² × 3 cores (including earthing cable)
Connecting Wiring between IDU & ODU	2.5 mm ² × 4 cores (including earthing cable)
Area Coverage	27.87 ~ 41.80 sq. meter
Maximum Refrigerant Pipe Length	25 m
Maximum Height Difference	15 m

Refrigerant Pipe Length



- * Cooling Capacity is derived Maximum during evening & night when the temperature is less than 31°C
- ** Under Standard Installation & Lab Test Condition # Model SRK24CW-S6 with 2D Air flow only



Address: D-157, Ground Floor Shop West Patel Nagar, Front Of
Bank Of Baroda News Delhi- 110008
E-mail: universeelectronic13@gmail.com
Mobile: +91-9911566744

