



HEAVY DUTY




COOLING TODAY, BETTER TOMORROW

mitsubishi heavy industries

SRK25CWX-S6

1.95Ton | R410A | 3Star

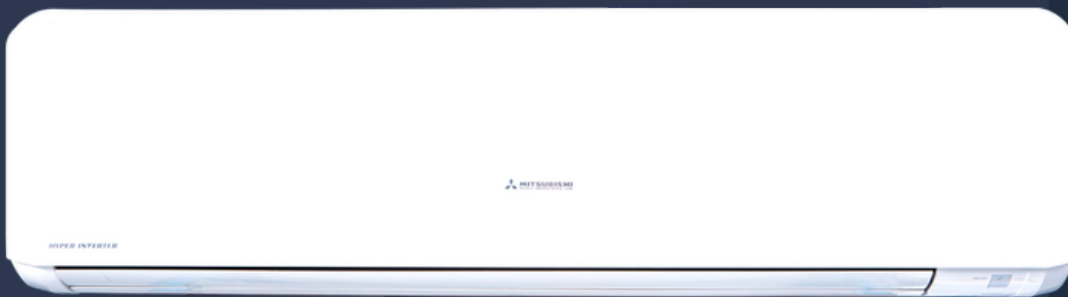


MADE IN THAILAND

Next
Generation
High
Performance
Airconditioning

MOVE THE WORLD FORWARD

SURROUNDING COOLING

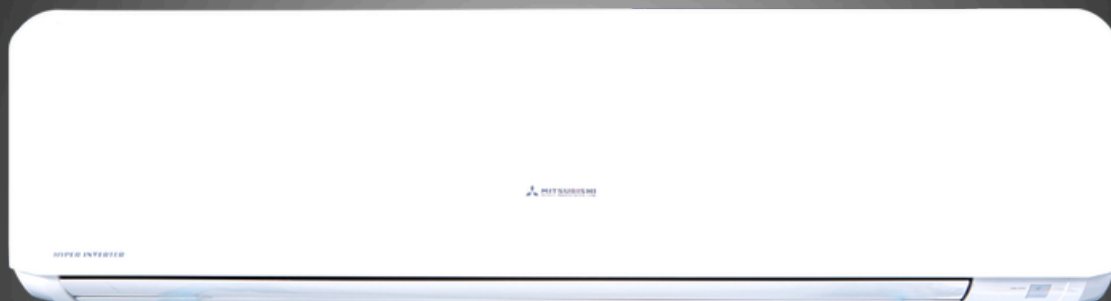

mitsubishi heavy industries

SRK25CWX-S6

1.95Ton | R410A | 3Star

Features

Comfortable Air Flow Functions



Comfortable Function



Convenient & Economy Functions



Maintenance



Clean Air



Others



Core Specifications

SRK2 5CWX-S6I PRODUCT SPECIFICATIONS

Parameter	SRK25CWX-S6
Model	SRK25CWX-S6
Capacity	1.95 Ton
BEE Star Rating - 2025	3 Star
Refrigerant	R410A
Refrigerant Control & Expansion	Dual Capillary Expansion
Compressor Type	Super Tropical - Return Cooled Rotary 1
Power Source	Phase, 230 V, 50 Hz
Rated Cooling Capacity @ 100% Load	23,458 BTU/hr
Rated Cooling Capacity @ 100% Load	6,875 Watts
Rated Power Consumption @ 100% Load	1,635 Watts
Rated EER / COP @ 100% Load	4.20 W/W
BEE Rated Indian Seasonal Energy Efficiency Ratio (ISEER)	4.20
Input Power (Minimum ~ Maximum)	1,385 ~ 1,635 Watts
Current (Minimum ~ Maximum)	6.2 ~ 7.3 A

Dimensions & Airflow

Unit	Dimensions	Net Weight
Indoor Unit	339 × 1197 × 262 mm	16 kg
Outdoor Unit	750 × 880 (+88) × 340 mm	52.5 kg

Airflow & Acoustic

SRK25CWX-S6I PRODUCT SPECIFICATIONS


Parameter	SRK20CSS-S6/A	
Air Flow	1,400 m³/hr	
Long Reach Airflow Upto	18.29 m	
Sound Level (H/M/L)	47 / 43 / 40 dB	
Louver Swing	3D + 3D AUTO	

Technical Details

SRK25CWX-S6I PRODUCT SPECIFICATIONS

Parameter	SRK20CSS-S6/A
Special Filter	Natural Enzyme + Photocatalytic Deodorizing Filter + Anti Bacterial
Blower Fan	Anti - Micro Bial
DC Fan Motor Speed	Auto / Powerful / High / Med / Low / Dry
Refrigerant Injection in Coil	Not separately specified in catalog table
Liquid Line	6.35 mm (1/4")
Gas Line	15.88 mm (5/8")
Main Power Supply to Outdoor Unit	2.5 mm ² × 3 cores (earthing cable)
Connecting Wiring between IDU & ODU	2.5 mm ² × 4 cores (earthing cable)
Area Coverage	27.88 ~ 37.17 sq. meter
Maximum Refrigerant Pipe Length	25 m
Maximum Height Difference	15 m

Refrigerant Pipe Length



- * Cooling Capacity is derived Maximum during evening & night when the temperature is less than 31°C
 ** Under Standard Installation & Lab Test Condition # Model SRK24CW-S6 with 2D Air flow only



Address: D-157, Ground Floor Shop West Patel Nagar, Front Of
 Bank Of Baroda News Delhi- 110008
 E-mail: universeelectronic13@gmail.com
 Mobile: +91-9911566744

